


CAMERA

# TD-9583E3

8MP IR Water-Proof  
Dome Network Camera



- Max.resolution: 3840 × 2160@30fps
- Smart H.265/H.264 coding
- ICR auto switch, true day / night vision
- 30 ~ 50m IR night view distance
- Motorized zoom lens
- 3D DNR, true WDR, HLC, BLC and ROI coding
- Support NIR and image distortion correction
- One CVBS output
- 1CH audio input, 1CH audio output and 1CH built-in MIC
- Built-in micro SD card slot, up to 256GB
- 1CH alarm input; 1CH alarm output
- DC12V/PoE power supply
- IP67 protection grade
- Support three streams
- P2P function optional
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics

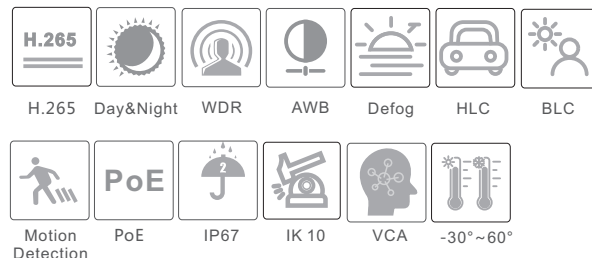

[en.tvt.net.cn](http://en.tvt.net.cn)

For more information, please visit our website

**Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.**

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay  
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong  
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)


### SPECIFICATIONS

Model	TD-9583E3
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 1.8 "CMOS
Image Size	3840x2160
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	DC Iris
Min. Illumination	0.01 lux @F1.5, AGC ON; 0 lux with IR 0.008 lux @ F1.2, AGC ON; 0 lux with IR
Lens	2.8 mm~12mm@F1.5, motorized lens;
Field of View	Horizontal : 96°~45.6°; Vertical: 64°~26.6°; Diagonal: 103.8°~51.5°
Lens Mount	Φ14
Day & Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~345°; Tilt: 0°~77°; Rotation: 0°~345°
<b>Image</b>	
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	8MP ( 3840 × 2160 ), 6MP( 3072 × 2048 ), 5MP( 2592 × 1944 ), 4MP( 2592 × 1520 ), 2K ( 2560 × 1440 ), 3MP ( 2304 × 1296 ), 1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
Main Stream	60Hz : 8MP/6MP/5MP/4MP/2K/3MP/1080P/720P(1~30fps) 50Hz : 8MP/6MP/5MP/4MP/2K/3MP/1080P/720P(1~25fps) HFR Mode: 60Hz:1080P/720P(1~60fps); 50Hz:1080P/720P(1~50fps)
Sub Stream	60Hz : 1080P/ 720P/D1/480 × 240 (1~30fps); 50Hz: 1080P/ 720P/D1/480 × 240 (1~25fps)
Third Stream	60Hz : 720P/D1/CIF/480 × 240 (1~30fps); 50Hz: 720P/D1/CIF/480 × 240(1~25fps)
Bit Rate	64 Kbps ~ 12 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
<b>Intelligent Analytics (Smart Events)</b>	
Perimeter Protection	Line crossing, region entrance/exiting/intrusion (human/motor vehicle/non-motor vehicle classification)
Target Counting	Line crossing human/motor vehicle/non-motor vehicle counting
Exception Detection	Scene change, video blur and video color cast detection
Face Detection	Face detection and face capture
General Intelligence	Crowd density detection, heat map, object abandoned/missing detection*
<b>Interfaces</b>	
Network	RJ45
Video Output	CVBS output (BNC × 1)
Audio	1CH audio input; 1CH audio output; 1CH built-in MIC
Storage	Built-in micro SD card slot; up to 256GB
Reset	Yes
Alarm	1CH alarm input; 1CH alarm output
<b>Functions</b>	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage

\*Grey items are being developed and coming soon.

Smart Alarm	Motion detection; Sensor alarm; SD card error; SD card full; IP conflict; Network disconnection
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, image distortion correction, NIR, etc.
PoE	Yes
IR Distance	30 ~50 m
Ingress Protection	IP 67&IK10
<b>Others</b>	
Power Supply	DC12V/PoE
Power Consumption	< 8W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions ( mm )	Φ 141 × 100.2
Weight ( net )	Approx.0.89KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

### DIMENSIONS

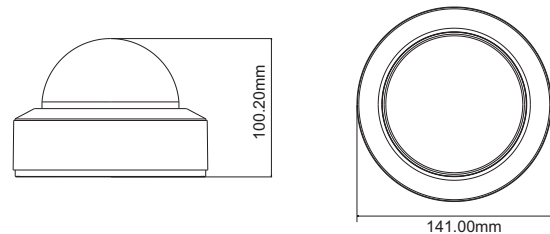

### AVAILABLE ACCESSORIES



### AVAILABLE MODEL

Available Model	TD-9583E3(D/AZ/PE/AR3)	Motorized zoom lens
-----------------	------------------------	---------------------