

CAMERA

# TD-9423E3B

## 2MP IR Starlight Bullet Network Camera



- 2MP ( 1920 × 1080 ) @30fps
- H.265+/H.265/H.264+/H.264/MJPEG coding
- 50 ~ 70m IR night view distance
- Motorized zoom lens
- Starlight
- 3D DNR, true WDR, HLC, BLC, Smart IR and ROI coding
- ICR auto switch, true day / night vision
- Support corridor mode
- Support electronic image stabilization
- Built-in micro SD card slot, up to 256GB
- 1CH alarm input; 1CH alarm output
- AC24V/DC12V/PoE power supply
- IP67 ingress protection; Support three streams
- Support mobile surveillance by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics



H.265 Day&Night WDR AWB Defog HLC



BLC Motion Detection PoE IP67 VCA -30°~60°



[en.tvt.net.cn](http://en.tvt.net.cn)

For more information, please visit our website

**Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.**

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)

### SPECIFICATIONS


Specifications	Model	TD-9423E3B		
<b>Camera</b>				
Image Sensor	1 / 2.8" CMOS			
Image Size	1920 × 1080			
Electronic Shutter	Auto/Manual mode; manual: 1 / 3 s ~ 1 / 100000 s			
Iris Type	DC Iris			
Min. Illumination	0.0038 lux@F1.4, AGC ON; 0 lux with IR			
Lens	2.8~12mm@F1.4, motorized			
Field of View	Horizontal: 100°~31°; Vertical: 53°~17°; Diagonal: 119°~36°			
Lens Mount	Φ 14			
Day& Night	ICR			
Wide Dynamic Range	120dB			
BLC	Yes			
HLC	Yes			
Defog	Yes			
Digital NR	3D DNR			
EIS	Yes			
S/N Ratio	≥50dB			
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°			
<b>Image</b>				
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG			
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile			
Resolution	1080P(1920×1080), 720P(1280×720), D1, CIF, 480×240, VGA(640×480)			
Main Stream	1080P/720P(60Hz: 1 ~ 30fps; 50Hz: 1 ~ 25fps)			
Sub Stream	720P/D1/CIF/VGA(60Hz: 1 ~ 30fps; 50Hz: 1 ~ 25fps)			
Third Stream	D1/CIF/480×240/VGA(60Hz: 1 ~ 30fps; 50Hz: 1 ~ 25fps)			
Bit Rate	64 Kbps ~ 6 Mbps			
Bit Rate Type	VBR / CBR			
Audio Compression	G711A / U			
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser			
ROI	Each ROI to be configured separately			
<b>Interfaces</b>				
Network	RJ 45 10M/100M self-adaptive Ethernet port			
Video Output	CVBS (BNC × 1)			
Audio	1CH audio input; 1CH audio output			
Storage	Built-in micro SD card slot; up to 256GB			
Reset	Yes			
Alarm	1CH alarm input; 1CH alarm output			
<b>Intelligent Analytics</b>				
Smart Event	Line crossing, region intrusion/entrance/exiting, loitering detection, illegal parking detection, abandoned/ missing object detection			
Target Counting	Target counting by line/area, heat map			
Exception Detection	Scene change, video blur and abnormal color detection, audio exception			
Face Detection	Face detection and face capture			
Video Metadata	Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 5 motor vehicle features and 1 non-motor vehicle feature			
<b>DORI Distance</b>				
Lens	Detect	Observe	Recognize	Identify
2.8~12mm(W)	43.32m(142.12ft)	17.33m(56.85ft)	8.66m(28.41ft)	4.33m(14.20ft)
2.8~12mm(T)	144.53m(474.17ft)	57.81m(189.66ft)	28.91m(94.84ft)	14.45m(47.40ft)
<b>Functions</b>				
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP			
Web Browser	IE11(plug-in required)/Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+			
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission			

Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1x, UPnP, HHTPS, QoS
Interface Protocol	ONVIF(profile S, G, T, M)
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection
General Function	Watermark, video mask, heartbeat, corridor pattern
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP
PoE	Yes, IEEE802.3af
IR Distance	50 ~ 70 m
Ingress Protection	IP67
<b>Others</b>	
Power Supply	AC24V/DC12V/PoE
Power Consumption	< 12W
Storage Conditions	- 30 °C ~ 65 °C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimensions ( mm )	278.3 × 100.2 × 88.7
Weight ( net )	Approx. 1.04KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

### DIMENSIONS

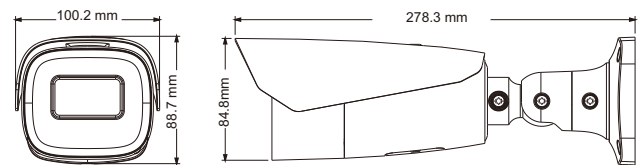

### AVAILABLE ACCESSORIES

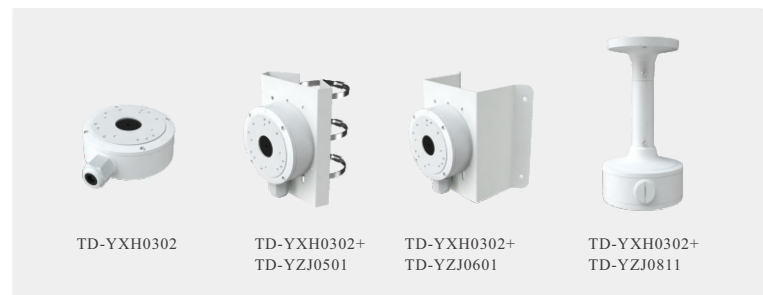

### AVAILABLE MODEL

Available Model	TD-9423E3B ( D / AZ / PE / AR5 )
-----------------	----------------------------------