

Hybrid DVR

# 4/8 CH Hybrid DVR



## TD-2004NS-HL-L TD-2008NS-HL-L



HD Output



DDNS



Network



PTZ



Audio



MIC



Mobile



CMS



USB



Mouse



E-mail

TD-2004/08NS-HL-L is a 4/8 CH 720P high definition DVR with ability to connect analog and IP cameras simultaneously, which adopts the standard H.265 high profile compression format and the advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system. TD-2004/08NS-HL-L supports 4/8CH video input, 1 CH audio input, simultaneous 4/8 CH playback.

The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.



[en.tvt.net.cn](http://en.tvt.net.cn)

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>


Fax: +86-755-33104777

E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)

### Features


- 4/8 CH TVI / AHD / CVI 1080P / 1080P Lite / 720P / 720P Lite / WD1 video input
- 4/8CH DVR supports 2 CH IP video input by default
- 4CH DVR: 4CH analog video input can be switched to 4CH IP video input
- 8CH DVR: 8CH analog video input can be switched to 8CH IP video input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface ( GUI ), window style operation by mouse
- Multi-mode recording: manual / timed / motion / AI recording
- Playback : 4 /8CH simultaneously playback
- Search: time slice, time, event, tag search
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Authorization management, log review and device status review
- Support 1080P output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

### DIMENSIONS

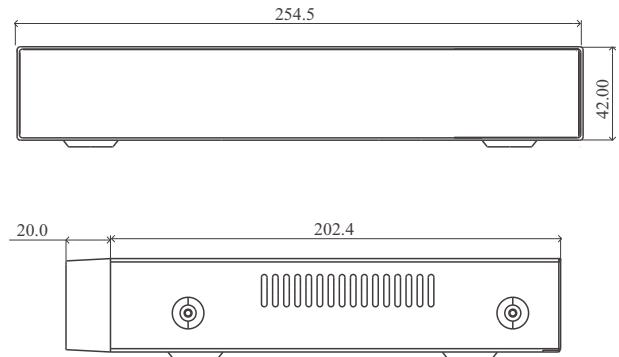


### Rear Panel

TD-2004NS-HL-L

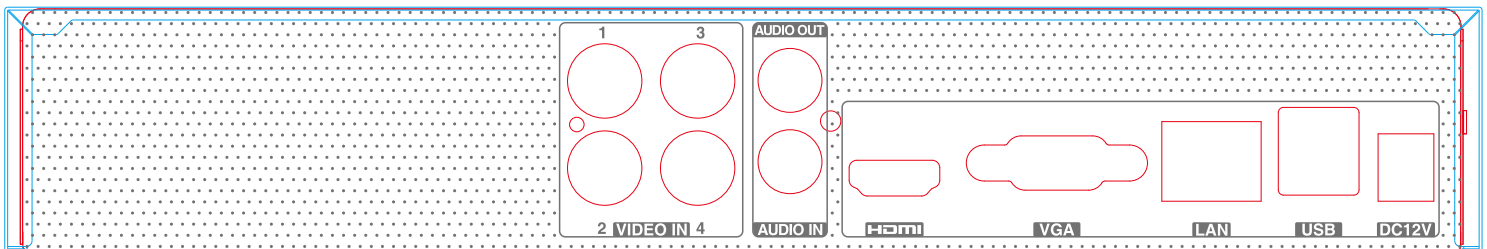

TD-2008NS-HL-L

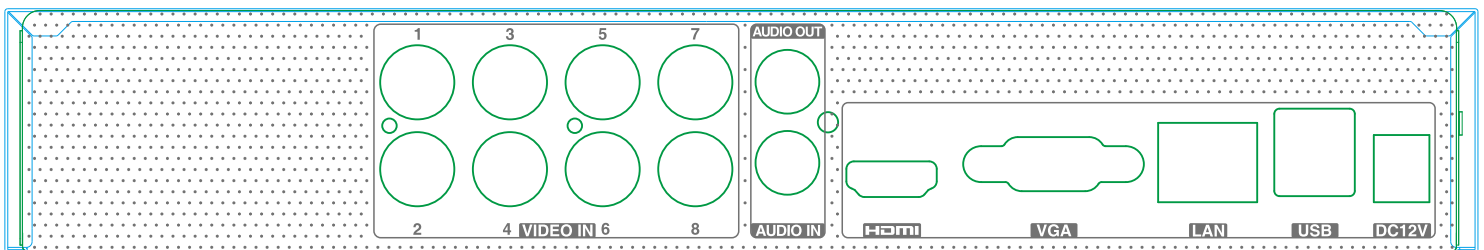

### SPECIFICATIONS

Model		TD-2004NS-HL-L	TD-2008NS-HL-L	
System	OS	Embedded Linux		
Video	Analog Video Input	BNC × 4	BNC × 8	
		BNC interface (1.0Vp-p; 75Ω)		
		TVI/AHD/CVI: 1080P/1080P Lite/720P/720P Lite/WD1		
	IP Video Input	2CH (up to 6CH)	2CH (up to 10CH)	
		Up to 2MP@30fps	Up to 5MP@25fps	
	Total Input	6CH	10CH	
	Output	HDMI × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768		
Compression	H.264/H.265			
Multi-screen Display	1/4/6/9	1/4/6/8/9/13/16		
Audio	Input	RCA × 1		
	Output	RCA × 1 (linear, 600Ω)		
	Two-way audio	Take up channel one audio input		
	Compression	G.711(U/A)		
Record	Resolution	1080P Lite/720P/WD1	1080P Lite/720P/720P Lite/WD1	
	Frame Rate	Analog Channel: 4CH DVR: 1080P Lite/720P/WD1: 25fps (PAL)/30fps (NTSC) 8CH DVR: 1080P Lite/720P/WD1: 25fps (PAL)/30fps (NTSC) (only CH 1 supports) 1080P Lite/720P/WD1: 12fps (PAL)/15fps (NTSC) (other channels support) 720P Lite: 25fps(PAL) / 30fps(NTSC) IP Channel: 25fps(PAL) / 30fps (NTSC)		
	Bit Rate	32Kbps ~ 4Mbps		
Playback	Playback	4 CH	8CH	
	Search	Time slice / time / event / tag search		
	Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events		
	Function	Play, pause, FF, FB, digital zoom, etc.		
Alarm	Mode	Manual, motion, exception, smart event		
	Input	No		
	Output	No		
Network	Interface	RJ 45 100Mbps × 1		
	Protocol	TCP/IP, HTTP, HTTPS, 802.1x, DHCP, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IPv6, UDP, WebSocket, PPPoE, SNMP, IGMP		
	Incoming Bandwidth	10Mbps	16Mbps	
	Outgoing Bandwidth	30Mbps	60Mbps	
	Client Connection	Max. 5 users access		
MobileDevice	OS	iOS, Andriod		
Storage	HDD	SATA × 1, up to 8TB		
Backup	Local Backup	U disk, USB mobile HDD		
	Network Backup	Yes		
Port	RS 485	No		
	USB	USB 2.0 × 2		
	Remote Controller	No		
Others	Power Supply	DC12V / 1.5A		
	Consumption	≤ 5W ( without HDD )		
	Dimensions(mm)	255 × 222 × 42 ( W × D × H )		
	Working Environment	-10~50°C, 10%~90% (humidity)		
	Certificate	CE, FCC		
Environment Protection	Directive EU RoHS, WEEE, REACH			