

16 CH NVR 8MP/6MP/5MP/4MP/3MP/1080P/720P HD NVR





TD-3016H1-B1-B



























HD Output

HD IPC

DDNS Network

Audio

Mobile

USB

Mouse

TD-3016H1-B1-B supports 16 CH 8MP/6MP/5MP/4MP/3MP/1080P/960P/ 720P high definition IP video input, which adopts the advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.

TD-3016H1-B1-B supports 16 CH IP input, simultaneous 9 CH playback, and 1080P high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.









en.tvt.net.cn For more information, please visit our website

Specifications


Model		TD-3016H1-B1-B
System	os	Embedded Linux
Video	Network Input	16 CH IPC input
	Network Input Resolution	8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/CIF
	Output	HDMI × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA: 1920 × 1080 / 1280 × 1024 / 1024 × 768 HDMI and VGA output the same video source
Audio	Compression	H.2658 / H.265+ /H.265 /H.264
	Multi-screen Display	1/4/6/8/9/13/16
	Network Input	16 CH IPC audio input
	2-way Audio	No
	Local Output	No (HDMI supports the audio output)
	Compression	G.711(U/A)
Record	Resolution	8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/CIF
	Frame Rate	30fps/25fps(NTSC/PAL)
	Simultaneous Playback	Max. 9 CH
	Search	Time slice / time / event / tag /smart search
Playback	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Decoding	Live View/	1CH 8MP;
Capability	Playback	4CH 1080P
	Type	Manual, sensor, motion, exception, smart events, etc.
Alarm	Input	Support IPC alarm input
	Output	Support IPC alarm output Record, snapshot, buzzer, preset, e-mail, etc.
	Interface	RJ 45 100Mbps × 1
Network	Protocol	TCP/IP, IPv4, IPv6, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPs, RTSP, ONVIF, etc.
	Incoming Bandwidth	64 Mbps
	Outgoing Bandwidth	64 Mbps
	Client Connection	Max. 64 users access
	Face Detection Performance (AI by IPC)	16 CH
	Face Detection Performance (AI by Device)	No
Face	Face Match Performance	No
	Statistical Graph	Bar graph
	of Information	
	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period
Perimeter Protection	Human/Vehicle Classification (AI by IPC)	16 CH
	Human/Vehicle Classification (AI by Device)	No
Video Metadata	Human/Vehicle Attribute Analysis (AI by IPC)	No
Other Functions	Fisheye	Supports fisheye dewarping via Web Client and mobile APP
	Plate Detection (AI by IPC)	Yes
Mobile Device	OS	iOS, Andriod
Storage	HDD Interface	SATA3.0 × 1, max 10T
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes

Port	USB	USB 2.0 × 2
	USD	
	Remote Controller	No
Others	Power Supply	DC 12V/1.5A
	Consumption	≤ 5W (without HDD)
	Dimensions (mm)	255 × 222 × 42 (W × D × H)
	Working Environment	-10 ~ 50 ℃ , 10% ~ 90% humidity
	Certificate	CE, FCC
	Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE

Features

- Support 16 CH 8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/DI/CIF IP video input
- H.265S/H.265+/H.265/H.264 coding
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-type recording: manual / timed / motion / sensor / POS / AI recording
- Playback : 9CH simultaneous playback
- Search: time slice, time, event, tag, smart search
- Support multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, crowd density, etc.
- Support POS information overlay on live view and playback
- \bullet Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- \bullet DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Authorization management, log view and device status view
- 1080P HD output, true high resolution display
- Support NAT function and QRCode scanning by mobile phones
- \bullet Powerful mobile surveillance by smart phones with iOS and Android OS

Dimensions

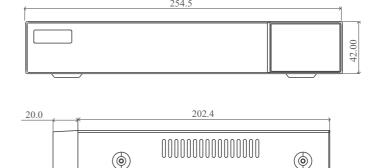



TD-3016H1-B1-B

Rear Panel

