
TVT

Secure The World With You

NVR

8CH PoE NVR

16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P HD PoE NVR

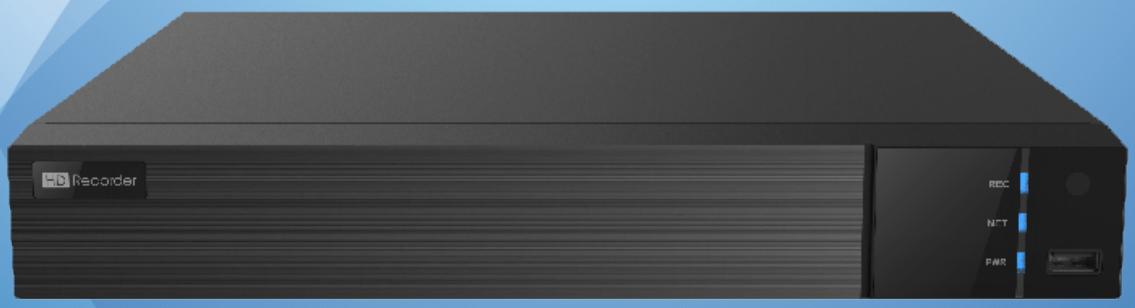

TD-3308H1-8P-B2-B(H)

4K Output | HD IPC | DDNS | Network | PTZ | Audio | MIC | Mobile | CMS | USB | Mouse | E-mail | STD | FR | VCA

TD-3308H1-8P-B2-B(H) supports 8 CH 16MP / 12MP / 8MP / 6MP /5MP / 4MP / 3MP / 1080P / 1280x1024/960P/ 720P high definition IP input, which adopts the advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.

TD-3308H1-8P-B2-B(H) integrates with 8 PoE network ports and supports 8 CH IPC direct connection to NVR , simultaneous 8 CH playback, and 4K high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Fax: +86-755-33104777

Web site: http://en.tvt.net.cn

E-mail: overseas@tvt.net.cn

TD-3308H1-8P-B2-B(H)

16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P HD PoE NVR

SPECIFICATIONS

Model		TD-3308H1-8P-B2-B(H)
System	OS	Embedded Linux
Video	Compression	H.265S/H.265+/H.265/H.264
	IP Video Input	8CH IPC input
	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Incoming/ Outgoing Bandwidth	160Mbps / 160Mbps (*when 8 IPCs are directly connected to 8 PoE ports, the incoming/outgoing bandwidth just can reach 80Mbps/80Mbps)
		*When the AI function of the IPC is enabled, the actual incoming bandwidth(max.bitrate) is more than the set value in the NVR.
	Output	HDMI : 3840 × 2160/1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA can be set to output the same or different video source with HDMI
	Multi-screen Display	Main output: 1/4/6/8/9 (live view) AUX output: 1/4/6/8/9 (live view) AI mode: max 8CH (HDMI and VGA output the same video source, AI by NVR, face comparison and PicSearch supported; Cloud storage not supported) Non-AI mode(default mode): max 16CH (VGA can be set to output the same or different video source with HDMI, AI by NVR, face comparison and PicSearch not supported; Cloud storage supported)
Audio	Network Input	8 CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
	Compression	G.711(U/A)
Record	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Frame Rate	NTSC: 30fps; PAL: 25fps
Cloud Storage	Number of Channels	4CH
	Record	Resolution: 1080P/720P
		Frame Rate: 15fps
Playback	Simultaneous Playback	Max 8 CH
	Search	Time slice / time / event / tag / smart search
	Function	Play, pause, FF, FB, digital zoom, etc.
Decoding Capability	Live View/ Playback	Non-AI Mode:1×16MP@30fps/4×8MP@30fps/8×3MP@30fps AI Mode: 1×16MP@30fps/4×5MP@30fps/8×2MP@30fps
Alarm	Mode	Manual, sensor, motion, exception, smart events, etc.
	Input	8 CH local alarm input
	Output	4 CH
	Triggering	Record, snap, preset, e-mail, etc.
Face	Face Detection Performance (AI by IPC)	8 CH
	Face Detection Performance (AI by NVR)	PicSearch disabled: 2 CH(2MP) or 1CH (4MP) PicSearch enabled: 1CH(2MP) or 1CH (4MP)
	Face Match Performance	PicSearch disabled: 6 CH PicSearch enabled: 3 CH
	Comparison Capability	18 pictures / second
	Face Picture Database	32 libraries 10000 Face Pictures
	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import
	Face Picture Comparison	Supports allow list, block list and stranger match alarm
	Track	Track display on a map
	Statistical Graph of Information	Bar graph
	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period
Perimeter Protection	Human/Vehicle Classification (AI by IPC)	8 CH
	Human/Vehicle Classification (AI by NVR)	PicSearch disabled: 2 CH(2MP) or 1CH (4MP) PicSearch enabled: 1CH(2MP) or 1CH (4MP)
Video Metadata	Human/Vehicle Attribute Analysis	Yes (AI by IPC)
Other Functions	Fisheye	Supports fisheye camera access
	Plate Recognition (AI by IPC)	Yes
PoE	PoE Port	RJ 45 100Mbps × 8
	Standard	IEEE802.3AF/AT
	Output Power	≤ 120W
Network	Interface	RJ 45 1000 Mbps × 1
	Protocol	TCP / IP, IPv4, IPv6, UDP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, HTTP, FTP, SMTP, HTTPs, 802.1x, RTSP, RTP, RTCP, WebSocket, SNMP, IGMP, ONVIF
	Client Connection	Max. 64 users access
Mobile Device	OS	iOS, Andriod
Storage	HDD Interface	SATA × 1, max 10T
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
External Interface	RS 485	Yes (full-duplex), connect to PTZ or keyboard
	USB	USB 3.0 × 1 ; USB 2.0 × 2
	Remote Controller	Optional
Others	Power Supply	DC48V/3.75A
	Consumption	⩽ 20W (without HDD and PoE power supply)
	Certificate	CE, FCC
	Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE
	Dimensions(mm)	300 × 249 × 45 (W × D × H)
	Working Environment	-10 ～ 50 ℃， 10% ～ 90% humidity

Features


- Supports 8 CH 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF IPC Input
- H.265S/H.265+/H.265/H.264
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-type recording: manual / timed / motion / sensor / POS / AI recording
- Playback : 8 CH simultaneous playback
- Search : time slice, time, event, tag and smart search
- Supports face detection and comparison
- Supports multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, etc.
- Supports license plate recognition
- Supports POS information overlay on live view and playback
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Compatible with third-party IPCs, such as ONVIF, Hikvision, etc.
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Supports 8CH PoE IPC direct connection to NVR via PoE ports
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Supports PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Supports NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Andriod OS


*All pictures and specifications are for reference only and are subject to change without prior notice.

TD-3308H1-8P-B2-B(H)


16MP/12MP/8MP/6MP/5MP/4MP/
3MP/1080P/960P/720P HD PoE NVR

DIMENSIONS

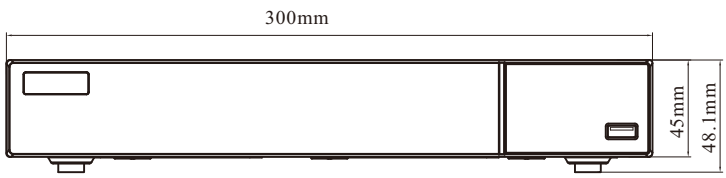

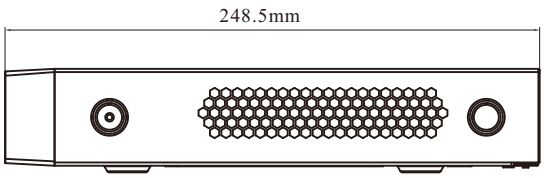

Rear Panel

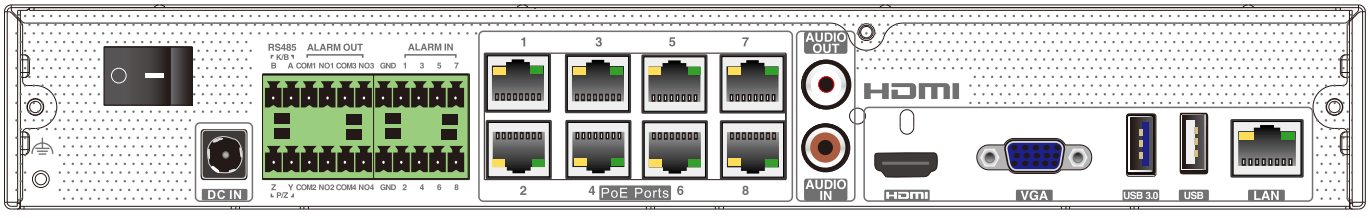

*All pictures and specifications are for reference only and are subject to change without prior notice.