
TE-VH1100S1-P

Video Intercom
Indoor Station

TE-VH1100S1-P

Intercom Indoor Station

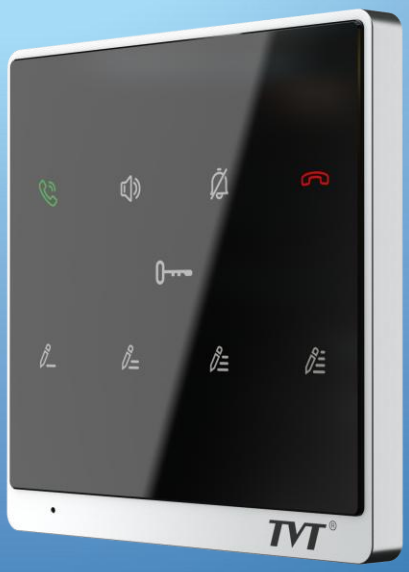

- Two-way audio between the indoor station and door stations
- A maximum of 6 indoor stations can be installed in the same room
- Supports “Do Not Disturb” function
- Supports noise suppression and echo cancellation
- 4 custom touch buttons, convenient for users to customize functional shortcuts as needed
- Standard PoE power supply

Shenzhen TVT Digital Technology Co., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China

Tel: +86-755-36995888 Website: http://en.tvt.net.cn

Fax: +86-755-33104777 E-mail: overseas@tvt.net.cn

TE-VH1100S1-P

Video Intercom
Indoor Station

Specifications

System	Operating System	Linux
Video	Video Input	Max. 1CH video can be viewed simultaneously
	Network Input Resolution	5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
	Compression	H.265+/H.265/ H.264
Audio	Local Input	Built-in microphone
	Local Output	Built-in speaker
	Compression	G.711(U/A)
Record	Resolution	Up to 2MP
	Frame Rate	NTSC: 30fps; PAL:25fps
Playback	Simultaneous Playback	Max.1CH
Performance	Linked IPC& Door Station	Max. 16 CH
	Linked Indoor Extensions	Max. 5
Network	Interface	RJ 45 100 Mbps self-adaptive Ethernet port ×1
	Protocol	TCP / IP, DHCP, RTSP, etc.
Interface	Audio	Built-in speaker and microphone, support noise suppression and echo cancellation
	Reset	Yes
	Touch Buttons	Yes
Touch Buttons	Answer	Yes
	Hang Up	Yes
	Volumn	Yes
	Do Not Disturb	Yes
	Unlock	Yes
	Custom Buttons	4 self-defined shortcut buttons
	Backlight Compensation	Yes
Others	PoE	IEEE802.3af
	Power	DC12V/POE
	Power Consumption	< 4W
	Dimensions(mm)	120mm ×120mm × 22.5mm
	Weight (net)	Approx.175g
	Installation	Wall mounting
	Working Environment	-20℃~50℃, Humidity: less than 95% (non-condensing)
	Certificate	CE, FCC
	Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE

Dimensions

Unit（mm）

