TVT


Secure The World With You

# TD-9462E4B-PA

## 6MP Dual-illumination Bullet Network Camera




- H.265+/H.265/H.264 +/H.264/MJPEG coding
- Max. resolution: 3296 × 1856
- 20~ 30m white light view distance; 30~50 IR view distance
- Support smart supplement light
- Support AI ISP
- ICR auto switch, true day / night vision
- 3D DNR, HWDR, HLC, BLC, Smart IR and ROI coding
- Built-in micro SD card slot; up to 512G
- DC12V/PoE power supply
- IP 66 ingress protection
- Support four streams
- Support NAT function
- Support SMD
- Support remote monitoring by smart phones & tablet PCs with iOS and Android OS
- Multiple smart events can be enabled at the same time
- Blue and red light warning (flashing alternately)
- Support user-defined warning voice import
- Dual system backup

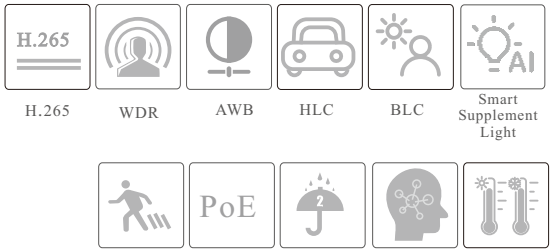


H.265 | WDR | AWB | HLC | BLC | Smart Supplement Light

Motion Detection | PoE | IP 66 | VCA | -30°~60°

en.tvt.net.cn

For more information, please visit our website

**Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.**

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Fax: +86-755-33104777

Web site: http://en.tvt.net.cn

E-mail: overseas@tvt.net.cn

# TVT TD-9462E4B-PA

## 6MP Dual-illumination Bullet Network Camera

## SPECIFICATIONS


| Model / Specifications | TD-9462E4B-PA |
|---|---|
| **Camera** | |
| Image Sensor | 1 / 2.4 "CMOS |
| Max. Resolution | 3296 × 1856 |
| Electronic Shutter | 1 / 3s ~ 1 / 100000 s |
| Iris Type | Fixed Iris |
| Min. Illumination | 0.003 lux @F1.2, AGC ON; 0 lux with illumination on |
| S/N Ratio | ⩾50dB |
| Lens | 2.8mm@F1.2, Horizontal FoV: 109°; Vertical FoV: 61°; Diagnoal FoV: 127°<br>3.6mm@F1.2, Horizontal FoV: 90°; Vertical FoV: 50°; Diagnoal FoV: 104° |
| Focus | Fixed |
| Lens Mount | M12 |
| Wide Dynamic Range | 120dB |
| BLC | Yes |
| HLC | Yes |
| Defog | Yes |
| Digital NR | 3D DNR |
| Angle Adjustment | Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360° |
| **Image** | |
| Video Compression | Main stream: H.265+/H.265/H.264+/H.264<br>Sub/Third stream: H.265+/H.265/H.264+/H.264/MJPEG<br>Fourth stream: H.265+/H.265/H.264+/H.264 |
| H.264 Compression Standard | Baseline Profile/Main Profile/High Profile |
| Resolution | 6MP (3296×1856), 3K (3200×1800), 4MP(2688×1520), 2K(2560×1440), 1080P (1920×1080), 720P (1280×720 ), D1, VGA (640 ×480), 640 ×360, CIF, 480×240 |
| Main Stream | 6MP/3K/4MP/2K/1080P (60Hz : 1~30fps; 50Hz: 1~25fps) |
| Sub Stream | 1080P(60Hz:1~15fps; 50Hz: 1~12fps)/<br>720P/D1/VGA/640×360/CIF/480×240(60Hz:1~30fps; 50Hz:1~25fps) |
| Third Stream | 720P/D1/VGA/640×360/CIF (60Hz: 1~30fps; 50Hz: 1~25fps) |
| Fourth Stream | 1080P/720P/D1/VGA/640×360/CIF/480×240(60Hz:1~30fps; 50Hz:1~25fps) |
| Bit Rate | 32 Kbps ~ 10 Mbps |
| Bit Rate Type | VBR / CBR |
| Audio Compression | G711A / U |
| Image Settings | ROI, Saturation, Brightness, Hue, Contrast,Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR, etc. adjustable through client software or web browser |
| ROI | 8 ROI, each ROI to be configured separately |
| **Interfaces** | |
| Network | RJ 45 (10/100 Base-T) |
| Video Output | No |
| Audio | 1CH audio input; 1CH audio output; 2CH built-in microphones; 1CH built-in speaker |
| Storage | Built-in micro SD card slot; up to 512G |
| Reset | Yes |
| Alarm | 1CH alarm input; 1CH alarm output |
| **Intelligent Analytics** | |
| Intelligent Video Detection (IVD) | Line crossing/ region intrusion/entrance/exiting (human/vehicle classification), loitering detection, illegal parking detection, abandoned/missing object detection, people gathering detection |
| Statistics | Target counting by line/area, heat map |
| Exception Detection | Scene change, video blur and abnormal color detection, audio exception |
| Face Detection | Face detection and face capture |
| Video Metadata | Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 4 motor vehicle features and 1 non-motor vehicle feature |

**DORI Distance**

| Lens | Detect | Observe | Recognize | Identify |
|---|---|---|---|---|
| 2. 8mm | 62m(202ft) | 25m(81ft) | 12m(40ft) | 6m(20ft) |
| 3.6mm | 78m(255ft) | 31m(102ft) | 16m(51ft) | 8m(26ft) |

| | |
|---|---|
| **Functions** | |
| Remote Monitoring | Web Client/ NVR/NVMS/mobile APP |
| Web Browser | Chrome 105.0+/Edge 105.0+/Firefox 121.0+/Safari 14.0+ |
| Online Connection | Support simultaneous monitoring for up to 10 users;<br>Support multi-stream real time transmission |
| Network Protocol | UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, FTP, PPPoE, DDNS, SMTP, SNMP, HTTP, 802.1x, UPnP, HTTPS, NAT, QoS |
| Interface Protocol | ONVIF Profile S/G/M/T |
| API&SDK | Yes |
| Storage | Network remote storage; micro SD card storage |
| Smart Alarm | Motion detection, SMD, sensor alarm, SD card error, SD card full,<br>IP address conflict, cable disconnection, light alarm, audio alarm |
| General Function | Watermark, video mask, heartbeat, smart IR, smart supplement light, image distortion correction, corridor pattern, ANR, cloud upgrade, disarming |
| Security | Firmware encryption, HTTPS encryption, configuration encryption, video encryption, illegal login lock, IP address filtering, 802.1x, log out after timeout basic and digest authentication for HTTP/RTSP/API service, TLS1.1/1.2/1.3 |
| PoE | Yes , IEEE802.3at, class4 |
| Supplement Light Range | IR range: 30 ~ 50 m; white light range:20 ~ 30 m |
| Ingress Protection | IP 66 |
| **Others** | |
| Power Supply | DC12V/PoE |
| Power Consumption | DC12V: < 13.1W; PoE: < 13.6W |
| Storage Conditions | - 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing) |
| Operating Conditions | - 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing) |
| Dimensions ( mm ) | 217.8 × 80.5 × 80.3 |
| Weight ( net ) | Approx. 0.69KG |
| Material | Aluminum alloy body |
| Installation | Ceiling mounting; Wall mounting |
| Certificate | CE, FCC |
| Environmental Protection | Directive EU RoHS, WEEE(2012/19/EU), and REACH(EC1907/2006) |

## DIMENSIONS

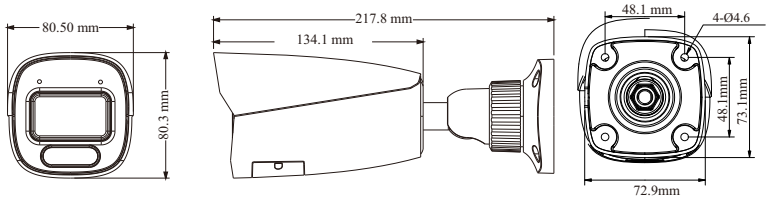


## AVAILABLE ACCESSORIES




## AVAILABLE MODEL

| Available Model | TD-9462E4B-PA(D/PE/AW3) |
|---|---|



*All pictures and specifications are for reference only and are subject to change without prior notice.