

CAMERA

TD-9352E3B

5MP AI Box Network Camera



- H.265+/H.265/H.254+/H.254/MJPEG coding
- Max. resolution: 2592 × 1944
- ICR auto switch, true day / night vision
- 3D DNR, true WDR, HLC, BLC, Defog, NIR, Smart IR and ROI coding
- Support image distortion correction
- Built-in micro SD card slot; up to 256GB
- 1CH audio input; 1CH audio output; 1CH built-in MIC
- 2CH alarm input; 2CH alarm output
- AC24V/DC12V/PoE power supply
- Support three streams
- Support remote monitoring by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics



H.265 Day&Night WDR AWB Defog HLC



BLC Motion Detection PoE VCA -30°~60°



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: overseas@tvt.net.cn

SPECIFICATIONS


Model	TD-9352E3B
Specifications	
Camera	
Image Sensor	1 / 2.7 "CMOS
Image Size	2592 × 1944
Electronic Shutter	1 / 2s ~ 1 / 100000 s
Iris Type	DC Iris
Min. Illumination	Color: 0.007 lux@F1.2, AGC ON B&W: 0 lux
Lens Mount	CS
Day & Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
S/N Ratio	≥ 50dB
Digital NR	3D DNR
Image	
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	5MP (2592×1944), 4MP (2592×1520), 2K (2560×1440), 3MP(2304×1296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
Main Stream	5MP/4MP/2K/3MP/1080P / 720P(60Hz : 1 ~ 30fps; 50Hz: 1~25fps) HFR mode: 1080P / 720P(60Hz : 1 ~ 60fps; 50Hz: 1~50fps)
Sub Stream	720P/D1/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Third Stream	D1/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Bit Rate	64 Kbps ~ 8 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ 45 10M/100M self-adaptive Ethernet port
Video Output	CVBS output (BNC × 1)
Audio	1CH audio input; 1CH audio output; 1CH built-in MIC
Alarm	2CH alarm input; 2CH alarm output
Storage	Built-in micro SD card slot; up to 256GB
Reset	Yes
RS 485	Yes
Intelligent Analytics (Smart Events)	
Perimeter Protection	Line crossing, intrusion (human/motor vehicle/non-motor vehicle classification)
Statistics	Target counting by line/area, heat map
Exception Detection	Scene change, video blur and abnormal color detection
Face Detection	Face detection and face capture
Other Events	Abandoned/missing object detection
Video Metadata	Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 5 motor vehicle features and 1 non-motor vehicle feature
Functions	
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP
Web Browser	IE11 (plug-in required)/Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPS, HTTP POST, QoS

Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, sensor detection, SD card error, SD card full, IP address conflict, cable disconnection
General Function	Watermark, video mask, heartbeat, image distortion correction, corridor pattern
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/HTTPS
PoE	Yes , IEEE802.3af
IR Distance	No
Weather-proof Grade	No
Others	
Power Supply	AC24V/DC12V/PoE
Power Consumption	< 7W
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	160.8 × 79 × 64
Weight (net)	Approx. 0.5KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

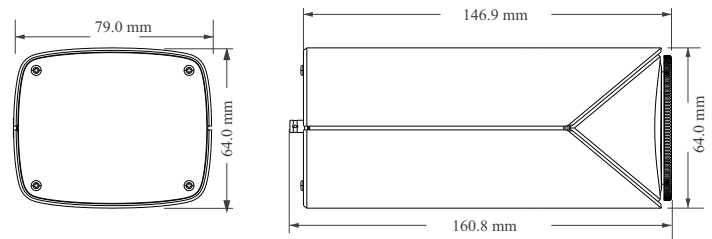

AVAILABLE ACCESSORIES

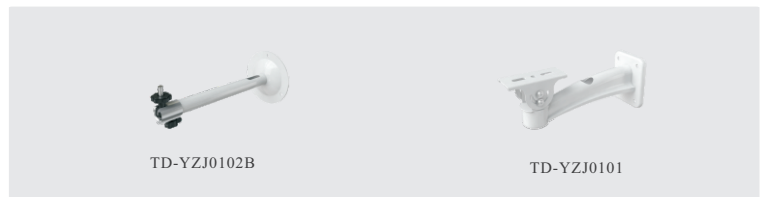

AVAILABLE MODEL

Available Model	TD-9352E3B(D/PE)
-----------------	------------------