


CAMERA

TD-9322E3B

2MP Starlight Box Network Camera



- 2MP (1920 × 1080) @30fps
- H.265+/H.265/H.264+/H.264/MJPEG coding
- Starlight
- ICR auto switch, true day&night vision
- 3D DNR, true WDR, HLC, BLC and ROI coding
- Support corridor mode
- Support electronic image stabilization
- Built-in micro SD card slot, up to 256GB
- 1CH audio input; 1CH audio output; 1CH built-in MIC
- 2CH alarm input; 2CH alarm output
- AC24V/DC12V/PoE power supply
- Support three streams
- Support mobile surveillance by smart phones & tablet PCs with iOS and Android OS
- Intelligent analytics

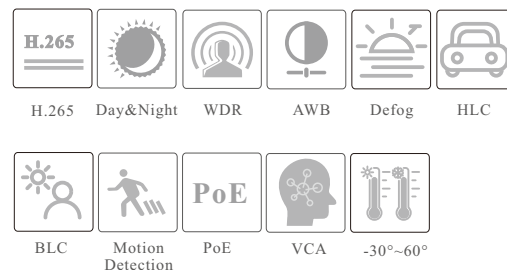

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: overseas@tvt.net.cn

SPECIFICATIONS


Model	TD-9322E3B	
Specifications		
Camera		
Image Sensor	1 / 2.8 "CMOS	
Image Size	1920 × 1080	
Electronic Shutter	Auto/Manual mode; manual: 1 / 3 s ~ 1 / 100000 s	
Iris Type	DC Iris	
Min. Illumination	Color: 0.0028 lux@F1.2,AGC ON B&W:0.002 lux@F1.2,AGC ON	
Lens Mount	CS	
Day & Night	ICR	
Wide Dynamic Range	120dB	
BLC	Yes	
HLC	Yes	
Defog	Yes	
Digital NR	3D DNR	
EIS	Yes	
S/N Ratio	≥50dB	
Image		
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG	
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile	
Resolution	1080P(1920×1080), 720P(1280×720), D1, CIF, 480×240, VGA(640×480)	
Main Stream	1080P/720P(60Hz:1 ~ 30fps; 50Hz: 1 ~ 25fps)	
Sub Stream	720P/D1/CIF/VGA(60Hz:1 ~ 30fps; 50Hz: 1 ~ 25fps)	
Third Stream	60Hz:D1/CIF/480×240/VGA(60Hz:1 ~ 30fps; 50Hz: 1 ~ 25fps)	
Bit Rate	64 Kbps ~ 6 Mbps	
Bit Rate Type	VBR / CBR	
Audio Compression	G711A / U	
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, NR, Image Flip, Image Mirror, etc. adjustable through client software or web browser	
ROI	Each ROI to be configured separately	
Interfaces		
Network	RJ 45 10M/100M self-adaptive Ethernet port	
Video Output	CVBS output (BNC × 1)	
Audio	1CH audio input; 1CH audio output; 1CH built-in MIC	
Storage	Built-in micro SD card slot; up to 256GB	
Reset	Yes	
Alarm	2CH alarm input; 2CH alarm output	
RS 485	Yes	
Intelligent Analytics		
Smart Event	Line crossing, region intrusion/entrance/exiting, loitering detection, illegal parking detection, abandoned/ missing object detection	
Target Counting	Target counting by line/area, heat map	
Exception Detection	Scene change, video blur and abnormal color detection, audio exception	
Face Detection	Face detection and face capture	
Video Metadata	Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 5 motor vehicle features and 1 non-motor vehicle feature	
Functions		
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP	
Web Browser	IE11(plugin-in required)/Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+	
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1x, UPnP, HTTPs, QoS	
Interface Protocol	ONVIF(profile S, G, T, M)	
Storage	Network remote storage; micro SD card storage	
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection	

General Function	Watermark, video mask, heartbeat, corridor pattern
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP
PoE	Yes, IEEE802.3af
Others	
Power Supply	AC24V/DC12V/PoE
Power Consumption	< 11W
Storage Conditions	- 30 °C ~ 65 °C (-22 °F ~ 149 °F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	160.8 × 79 × 64
Weight (net)	Approx. 0.65KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

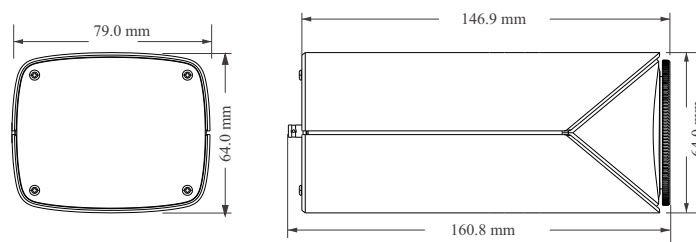

AVAILABLE ACCESSORIES

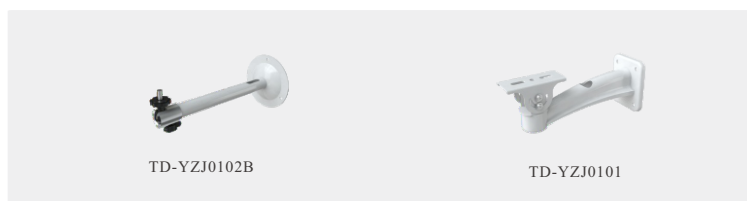

AVAILABLE MODEL

Available Model	TD-9322E3B (D / PE)
-----------------	---------------------