


TD-9322S4H

2MP Starlight Box Network Camera

Powered by **Light Explorer**



- H.265+ /H.265 /H.264+/H.264/MJPEG coding
- Max.resolution: 2MP (1920 × 1080)
- ICR auto switch, true day / night
- Starlight
- 3D DNR, WDR, HLC, BLC and ROI coding
- Support 1CH alarm input; 1CH alarm output
- Support RS485
- Support 1CH audio input; 1CH audio output
- Support SD card slot, up to 256GB
- AC24V/DC12V/PoE power supply
- Support three streams
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent Analytics

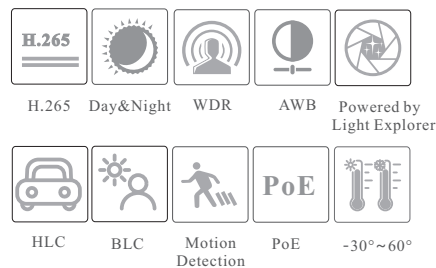

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: overseas@tvt.net.cn

SPECIFICATIONS

Model	TD-9322S4H
Specifications	
Camera	
Image Sensor	1 / 2.8"CMOS
Image Size	1920 × 1080
Electronic Shutter	1/2s ~ 1 / 100000 s
Iris Type	Fixed
Min. Illumination	Color: 0.0028 lux@F1.2,AGC ON; B&W: 0.0002 lux@F1.2, AGC ON
Lens Mount	C/CS
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	No
Digital NR	3D DNR
Image	
Video Compression	Main stream: H.265+ / H.265 / H.264 + / H.264; Sub/Third stream: H.265+ / H.265 / H.264 + / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, 640× 480, 480× 240, CIF
Main Stream	60Hz: 1080P/720P(1~30fps); 50Hz: 1080P/720P(1~25fps)
Sub Stream	60Hz: D1/640× 480/CIF (1~30fps);50Hz: D1/640× 480/CIF (1~25fps)
Third Stream	60Hz: D1/480× 240/CIF (1~30fps);50Hz: D1/480× 240/CIF(1~25fps)
Bit Rate	128 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ 45
Alarm	1CH alarm input; 1CH alarm output
Audio	1CH audio input; 1CH audio output
RS 485	Yes
Storage	1CH built-in SD card slot; up to 256GB
Reset	Yes
Functions	
Remote Monitoring	Web browser /TVT NVR/NVMS2.X/Mobile APP
Web Browser	IE (plug-in required)/Google Chrome/Edge/Firefox/Safari
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, RTMP, UPnP, HTTP, HTTPS, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; SD card storage
Intelligent Analytics	Video exception (scene change, video blur and video cast detection), region intrusion detection, line crossing detection, abandoned/missing object detection
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection
General function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock, corridor pattern
PoE	Yes
Others	
Power Supply	AC24V/DC12V/PoE
Power Consumption	< 7W

Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F); Humidity: less than 95 % (non-condensing)
Storage Environment	- 30 °C ~ 65 °C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	138.4 × 70 × 60.5
Weight (net)	Approx. 0.37KG
Installation	Wall mounting, ceiling mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

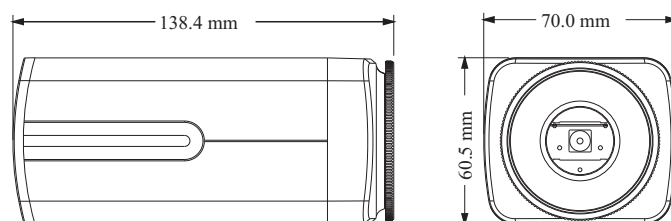

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9322S4H(D/PE)
-----------------	------------------