


TD-9524C2

2MP Full-Color Turret Network Camera



- 2MP (1920 × 1080) H.265 full real time coding
- Max. resolution: 1920 × 1080
- 20~ 30m white light view distance
- 24/7 full color imaging
- 3D DNR, HWDR, HLC and BLC
- ROI coding
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- IP67 ingress protection
- Support three streams
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent Analytics

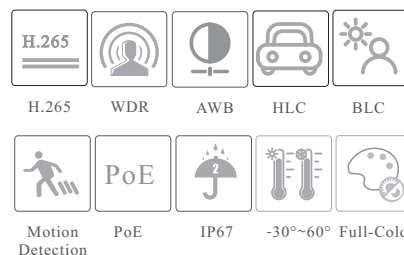

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn


SPECIFICATIONS

Model	Specifications
TD-9524C2	
Camera	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.002 lux@ F1.0, AGC ON; 0 lux with LED ON
S/N Ratio	≥50dB
Lens	2.8 mm @F1.0, H.FoV: 105.2°; V.FoV:55.5°; D.FoV:125.1° 3.6 mm @F1.0, H.FoV: 84.6°; V.FoV:45.9°; D.FoV:100°
Focus	Fixed
Lens Mount	M12
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	No
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~75°; Rotation: 0°~360°
Image	
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, 640 × 480, CIF, 480 × 240
Main Stream	60Hz:1080P(1~30fps)/720P(1~30fps); 50Hz:1080P(1~25fps)/720P(1~25fps)
Sub Stream	60Hz : D1/CIF/640 × 480 (1~30fps); 50HZ: D1/CIF/640 × 480 (1~25fps)
Third Stream	60Hz : D1/CIF/480×240 (1~30fps); 50HZ: D1/CIF/480×240 (1~25fps)
Bit Rate	128 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ 45
Video Output	NO
Audio	1CH audio input; 1CH built-in MIC
Storage	Built-in micro SD card slot, up to 256GB
Reset	Yes
Functions	
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP
Web Browser	IE(plugin-in required)/Google Chrome/Edge/Firefox/Safari
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPs, HTTP, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Intelligent Analytics	Video exception detection, intrusion detection and line crossing detection, abandoned/missing object detection
Smart Alarm	Motion detection, SD card error, SD card full
General function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock, corridor pattern
PoE	Yes (IEEE802.3af)
White Light Range	20 ~ 30 m
Ingress Protection	IP 67

DORI Distance

Lens	Detect	Observe	Recognize	Identify
2.8mm	41.05m(134.67ft)	16.42m(53.87ft)	8.21m(26.93ft)	4.10m(13.45ft)
3.6mm	51.01m(167.35ft)	20.40m(66.92ft)	10.20m(33.46ft)	5.10m(16.73ft)
Others				
Power Supply	DC12V/PoE			
Power Consumption	< 5.5W			
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)			
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)			
Dimensions (mm)	Φ 94.6 × 82.8			
Weight (net)	Approx. 0.45KG			
Installation	Ceiling mounting; wall mounting			
Certificate	CE, FCC			
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)			

DIMENSIONS

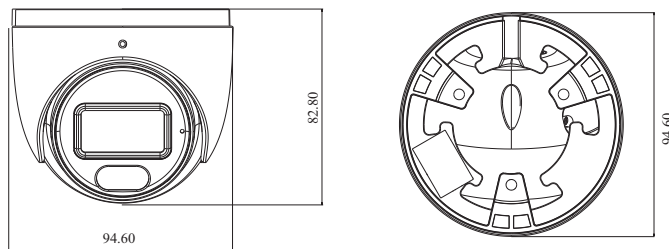

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9524C2(PE/WR2)
-----------------	-------------------