TD-8523IE3N

5in Gen3 PTZ Series

5inch 2MP 25X/32X/40X IR PoE AI PTZ Dome Camera



TD-8523IE3N(PE/25M/AR30)
TD-8523IE3D(PE/32M/AR30)
TD-8523IE3N(PE/40M/AR40)

HDR | 1080P | VCA | Smart tracking

Perimeter | PoE+ | IP67 | 300m-400m

System:

The 3rd gen 5inch AI PTZ camera series, which adopts a high quality 25x, 32x or 40x optical zoom lens, and high computing AI SOC, could deliver top-notch 1920 ×1080@30fps image details over a wide-open area. The PTZ camera can detect max 15 objects per scene and classify human/vehicles from 600m to 1000m in radius. When any of them intrude restricted area, the camera will trace, zoom fit in center of screen, snap and record and trigger alarms until object disappeared or time expired, greatly improving surveillance efficiency.

The 5inch Gen3 PTZ improves many aspects to further utilize AI capacity. The revised gimbal system is up to 330 °/s, which could automatically track express fast large objects at 300km/h within several miles distance. The rotation mechanics is enforced to endure over 10 million times for long-time heavy usage. The 3rd gen PTZ adopts black-ray image and new stacked IR technology, which filter all the intrusive lights and focus on human and vehicles themselves, thus it could track and recognize human details within hundreds of meters, challenging the most complex environment, whatever it is bright sun-shrine or in pitch black, snowy or rainy, strong headlights of cars and streetlamps, etc.

With competitive price, excellent picture quality and strong protection, the camera could meet the demand of 7×24Hour working in harsh weather for professional surveillance market.

Key Spec:

- Ultra fast rotation and tracking speed and over 10millions of tracking life circles.
- Superior low light performance
- Long IR supplement light distance
- 1.5Tops Deep-learning engine, support human/vehicles detection, auto-tracking
- IP67 Water immersion /true IK10 glass/6KV Surge protection,7x24H harsh weather
- Stable supply-chain, long product life circle
- Confirms to data protection regulations of major countries.

Application:

Wide range area intrusion, perimeter protection and alarm and smart tracking: such as airport, express way, parks, scenic spots, stations and venues, industrial park.

Suggestion installation: at 5-10m in height.

TD-8523IE3N

5in Gen3 PTZ Series

SPECIFICATION:

Camera Module	**TD-8523IE3N(PE/25M/AR30)**	**TD-8523IE3D(PE/32M/AR30)**	**TD-8523IE3N(PE/40M/AR40)**
Image sensor	1/2.8" progressive scan CMOS image sensor, BSI and NIR++, dual gain		
Max resolution	1920×1080		
Mini. Illumination	Color: 0.00125Lux@ (F1.55, AGCON) B/W: 0.00025Lux@ (F1.55, AGC ON); 0 Lux with IR	Color: 0.00125Lux@ (F1.65, AGCON) B/W: 0.00025Lux@ (F1.65, AGC ON); 0 Lux with IR	Color: 0.001 Lux@(F1.2, AGC ON); B/W: 0.0002Lux@ (F1.2, AGC ON); 0 Lux with IR
Image setting	Flip, Mirror, Saturation, Brightness, Contrast, Sharpness, AGC, etc. adjusted by client		
Shutter Speed	60Hz: 1/30s – 1/30,000s@30fps; 50Hz: 1/25s~1/25,000s@25fps		
White Balance	Auto/Manual/Indoor/Outdoor		
Gain control	Auto/Manual		
Day & Night control	Auto/Manual, time schedule		
Iris control	Auto/Manual		
SNR	≥52dB		
3D DNR	Auto/Manual		
AE Enhancement	BLC, HLC, WDR		
Day& Night	ICR		
Digital Zoom	16X		
EIS	N/A		
Privacy Mask	4 mask areas(ver5.1.1)		
Picture overlay	Logo picture could be overlaid on video with 128×128pixels, 24bits format		
OSD overlay	Max 15 characters/line, 8 lines, white or red font color		
Lens	**TD-8523IE3N(PE/25M/AR30)**	**TD-8523IE3D(PE/32M/AR30)**	**TD-8523IE3N(PE/40M/AR40)**
Focus length	f=4.8-120mm, 25x optical zoom	f=4.8-154mm, 32x optical zoom	f=4.5-180mm, 40x optical zoom
Zoom Speed	Approx. 3.6s	Approx. 4.4s	Approx. 5.2s
Field of View (W-T, ±5%)	Horizontal: 57.6 °~ 2.5 ° Vertical: 34.4 °~ 1.4 ° Diagonal: 64.5 °~2.9 °	Horizontal: 59.38 °~ 2.28 ° Vertical: 35.74 °~ 1.29 ° Diagonal: 66.28 °~2.61 °	Horizontal: 59.1 °~1.8 ° Vertical: 38.4 °~ 1.1 ° Diagonal: 6.9 °~ 2.1 °
Image distance	Wide: 1.0m ~ INF; tele: 1.5m ~ INF		
Aperture Range	F1.55~F3.8(W-T)	F1.65-F4.70(W-T)	F1.2-F3.5(W-T)
Iris Type	HALL_IRIS		
IRCut type	Removable IRCF, absorbing type	Removable IRCF, reflection type	Removable IRCF, absorbing type

DORI Dist.	Focus length	f=4.8mm	f=120mm	f=4.8mm	f=154mm	f=4.5mm	f=180mm
	Detect	73.5m(241.1 f.t.)	1517m(4978f.t.)	73.5m(241.1 f.t.)	1912.6m(6275 f.t.)	69m (225.4 f.t.)	2477m(8126.6f.t.)
	Observe	29.2m(95.7 f.t.)	602m(1975.7f.t.)	29.2m(95.7 f.t.)	759.1m(2490.6f.t.)	27m (89.4 f.t.)	991m(3250.7f.t.)
	Recognize	14.7m(48.22 f.t.)	303m (995.4 f.t.)	14.7m(48.22 f.t.)	382.5m(1254.9f.t.)	14m(45.08f.t.)	495m(1625.3f.t.)
	Identify	7.35m(24.11 f.t.)	152m (497.7 f.t.)	7.35m(24.11 f.t.)	191.3m(627.5f.t.)	6.9m(22.54 f.t.)	248m(812.7 f.t.)

PTZ	
Pan Range	360 °endless
Pan speed	Configurable, from 0.1~360 °/s; Preset speed: 330 °/s
Tilt Range	Mechanical: -25 °to 155 °, auto flip at 90 °
Tilt Speed	Configurable, from 0.1 °~210 °/s, Preset speed: 180 °/s
Proportional Zoom	Yes
Preset	360
Cruise	8 cruises, up to 16 presets for each cruise
Trace	4 traces, record time over 3 minutes for each trace
Power off memory	Support
Action mode	Preset/Cruise/Trace/Auto Scan/Random Scan
3D Positioning	Support
PTZ status display	Support
Schedule Task	Preset/Cruise/Trace/Random Scan/Boundary Scanning/Dome reboot

IR	**TD-8523IE3N(PE/25M/AR30)**	**TD-8523IE3D(PE/32M/AR30)**	**TD-8523IE3N(PE/40M/AR40)**
IR Distance	300m (984.3 f.t.)	300m (984.3 f.t.)	400m (1312.3 f.t.)
IR type	2W 850nm IR Array, 8pcs	4W 855nm IR Array, 8pcs	5W 855nm IR Array,8pcs

Smart IR	Yes		
Network			
Mainstream	50Hz/25fps: 1920×1080, 1280×960, 1280×720, 60Hz/30fps: 1920×1080, 1280×960, 1280×720		
Sub stream	50Hz/ 25fps (704 ×576, 640 ×480, 352 ×288); 60Hz/30fps (704 ×480, 640 ×480, 352 ×240)		
Third Stream	50Hz/25fps (1920 ×1080, 1280 ×960, 1280 ×720, 704 ×576, 640 ×480, 352 ×288) 60Hz/30fps (1920 ×1080, 1280 ×960, 1280 ×720, 704 ×480, 640 ×480, 352 ×240)		
Video compression	H.265+/H.265/H.264+/H.264/MJPEG		
H.264 Standard	H.264/AVC codec BP/MP/HP, Level 5.1		
H.265 Standard	H.265/HEVC codec MP, level 5.0		
Video Bit Rate	64 Kbps to 16Mbps		
Audio compression	G.711 A/U		
Audio Bit Rate	64K bps		
Protocols	HTTP, HTTPS, IPv4/IPv6, 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE, P2P, RTMP		
User / Host	Up to 16 users, 3 levels: Administrator, Advanced User and Normal User		
Security Measures	User authentication (ID and PW), Host authentication (MAC address); HTTPS encryption, IEEE802.1x port-based network access control; IP address filtering		
API	ONVIF G/S/T, support TVT SDK and third-party management platform		
Client	TVT N9000 1.4.7, TVT NVMS 2.0; and the third-party client, free iOS and Android App		
Web Browser	IE8-11 with plug-in; Edge, Chrome, Firefox with plugin free		
Smart Features			
Basic event	Motion detection, Video tampering alarm, Exception(Network disconnected, IP address conflict, SD full, SD error)		
Face recognize	(Default off, open per request) Face detection, capturing, comparison. Max 17 faces per scene		
Road traffic	Vehicle detecting and tracking.		
Smart Detection	Tripwire, Bi-directional tripwire, Illegal intrusion detection, Region entrance detection, Region exiting detection, etc.		
Smart Tracking	Support smart tracking of human or vehicle, auto/manual		
System Integration			
Alarm Interface	1 Alarm input (Dry contact); 1 Alarm output		
Audio Interface	1 audio input, line level, 2.0-2.4Vpp, impedance 1KΩ; 1 audio output, line level, impedance, 600Ω		
Alarm Linkage	Alarm actions, such as Preset, Cruise, Trace, Memory Card Video Record, Trigger Recording, Notify Surveillance Center, Upload to FTP/Memory Card, Send Email, etc.		
Network Interface	1 RJ45 10M/100M Adaptive Ethernet; Support PoE+		
SD Card Slot	One MicroSD slot and chamber, up to 256G		
Built-in Speaker& Mic	N/A		
RS485	N/A		
BNC	N/A		
Reset button	Yes		
Heater &Fan	Yes		
Water removal	Remove water-drops by quick spinning		
Demist	Active electric heating and air loop		
General	**TD-8523IE3N(PE/25M/AR30)**	**TD-8523IE3D(PE/32M/AR30)**	**TD-8523IE3N(PE/40M/AR40)**
languages	Czech; English, German, Hungarian, Italian, Japanese, Korean, Portuguese, Polish, Russian, Romanian, Spanish; Spanish (Mexico), Simplified Chinese, Turkish, Traditional Chinese, etc.		
Power Adaptor	AC24V3000mA, DC24V 2500mA , ±25%		
PoE Supply Spec	30W PoE+, 802.3.at	30W PoE+, 802.3.at	60W PoE++, 802.3.bt
Power consumption	Avg.12W, max 19W, include IR 4W	avg. 12W, max 24W, including IR 8W	avg. 12W, max 27W, including IR 10W
Working condition	-40 ℃ ~ 65 ℃ (-40 ℉ ~ 149 ℉), IR off; -40 ℃ ~ 45 ℃, IR on; Cold start at - 30 ℃; 90%RH		
Storage condition	-40 ℃ ~ 70 ℃; ≤ 95% RH		
Protection	6000V Lightning Protection, Surge Protection and Voltage Transient Protection		
Shield Material	Aluminum Alloy (ADC12); Polymer (PC+GF15%)		
Dimensions	Φ 197mm × 302mm (Φ7.8 inch ×11.9 inch)		
Net Weight	Approx. 2.8 Kg (6.17 lb.)	Approx. 2.82 Kg (6.22 lb.)	Approx. 2.9 Kg (6.4 lb.)
Certification	IP67, IK10, ROHS, CE, FC, KC, BIS, UKCA		


TD-8523IE3N

5in Gen3 PTZ Series

Ordering information:

TD-8523IE3N(PE/25M/AR30)	2MP 25X IR 300m PoE Network AI NDAA 5inch Speed PTZ Camera, IP67/IK10, AC24V/DC24V/PoE+, not include power adaptor &bracket
TD-8523IE3D(PE/32M/AR30)	2MP 32X IR 300m PoE Network AI NDAA 5inch Speed PTZ Camera, IP67/IK10, AC24V/DC24V/PoE+, not include power adaptor &bracket
TD-8523IE3N(PE/40M/AR40)	2MP 40X IR 400m PoE Network AI NDAA 5inch Speed PTZ Camera, IP67/IK10, AC24V/DC24V/PoE++, not include power adaptor &bracket

Dimensions(mm/inch):

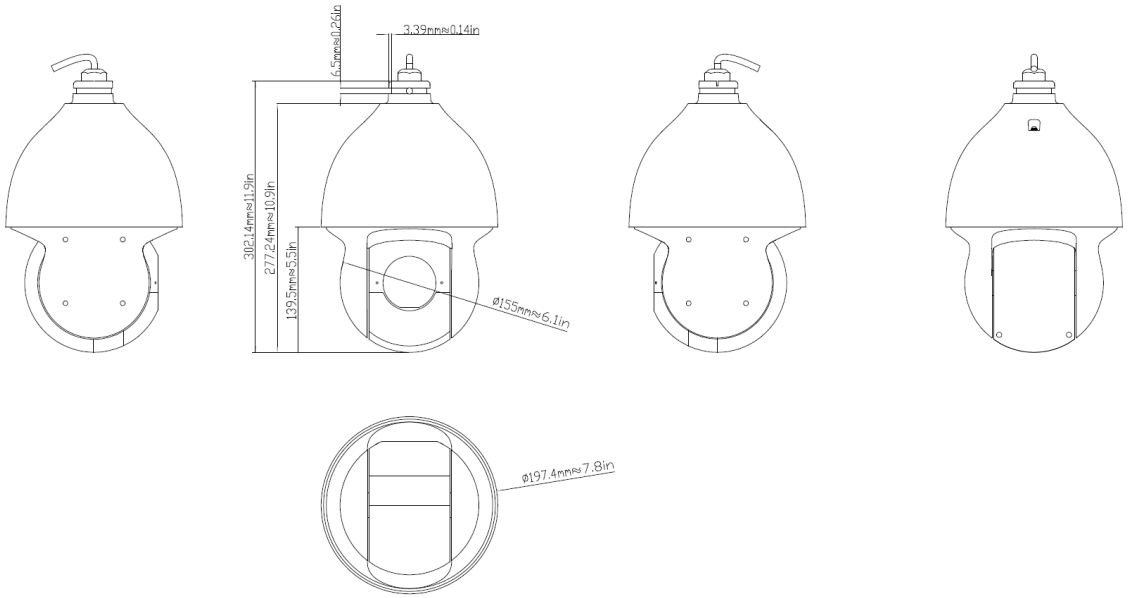

Accessories(optional):



TD-YZJ0321

Wall mounting bracket



TD-YZJ0321+TD-YZJ0501

Pole mounting bracket



TD-YZJ0321+TD-YZJ0601

Corner mounting bracket



TD-YZJ0807

Pendant mounting bracket



TD-YZJ0311

Wall mounting bracket with junction box



TD-YZJ0312

Pole mounting bracket with junction box



TD-YZJ0313

Corner mounting bracket with junction box



TD-K23

PTZ Keyboard



DC24V2.5A Supply



AC24V/3A Power supply



TD-B901

PoE+(30W) Midspan



TD-B902

PoE++(60W) Midspan

*** All pictures and texts are for reference only. Actual product may vary due to product enhancements.**

Shenzhen TVT Digital TECHNOLOGY CO., LTD

23rd Floor, Block B4, Building No.9, Shenzhen Bay, Eco-Technology Park, Nanshan District, Shenzhen, Guangdong, P.R.China

Tel: +86-755-36995888

Fax: +86-755-33104777

Web site: http://en.tvt.net.cn

E-mail: overseas @tvt.net.cn